

# Blade Line Diverter

- Heavy duty wear blade with UHMW polyethylene blade seal
- Air operated, requires 90-100 psig clean, dry plant air
- Diverts product at a 30° angle
- Designed for vacuum or pressure systems

## Application

The Schenck Process Blade Line Diverter features a heavy duty wear blade with a synthetic polymer insert to seal against the valve end plates. The insert creates a tight seal reducing contamination possibilities.

The Blade Line diverts product at a 30° angle and is designed for use in vacuum or pressure systems directing material from two sources into one destination (or reverse).

## Schenck Process offers three versions of Blade Line Diverters:

- Cast iron with a pneumatic actuator in line sizes from 2-1/2" to 6"
- Cast iron with a manual actuator in line sizes from 2-1/2" to 6"
- Fabricated, air actuated model
  - line sizes 2-1/2" to 6" in stainless steel (8" and 10" are optional in stainless steel)
  - line sizes 8" and 10" in carbon steel




## Features

- Heavy duty wear blade with UHMW polyethylene blade seal
- Air operated, requires 90-100 psig clean, dry plant air
- Standard service temperature up to 160° F maximum
- Maximum air pressure is 15 psig

## Options

- 4-way, NEMA 4 or single or double NEMA 9 solenoid air control valve requires 120 VAC, 60 Hz, single phase, 6.2 – 6.3 watt power source
- NEMA 4 or NEMA 9 position proof switch is equipped with 2 N.O. and 2 N.C. switches rate at 10 Amp continuous
- Fabricated 304 or 316 stainless steel construction

# Dimensions

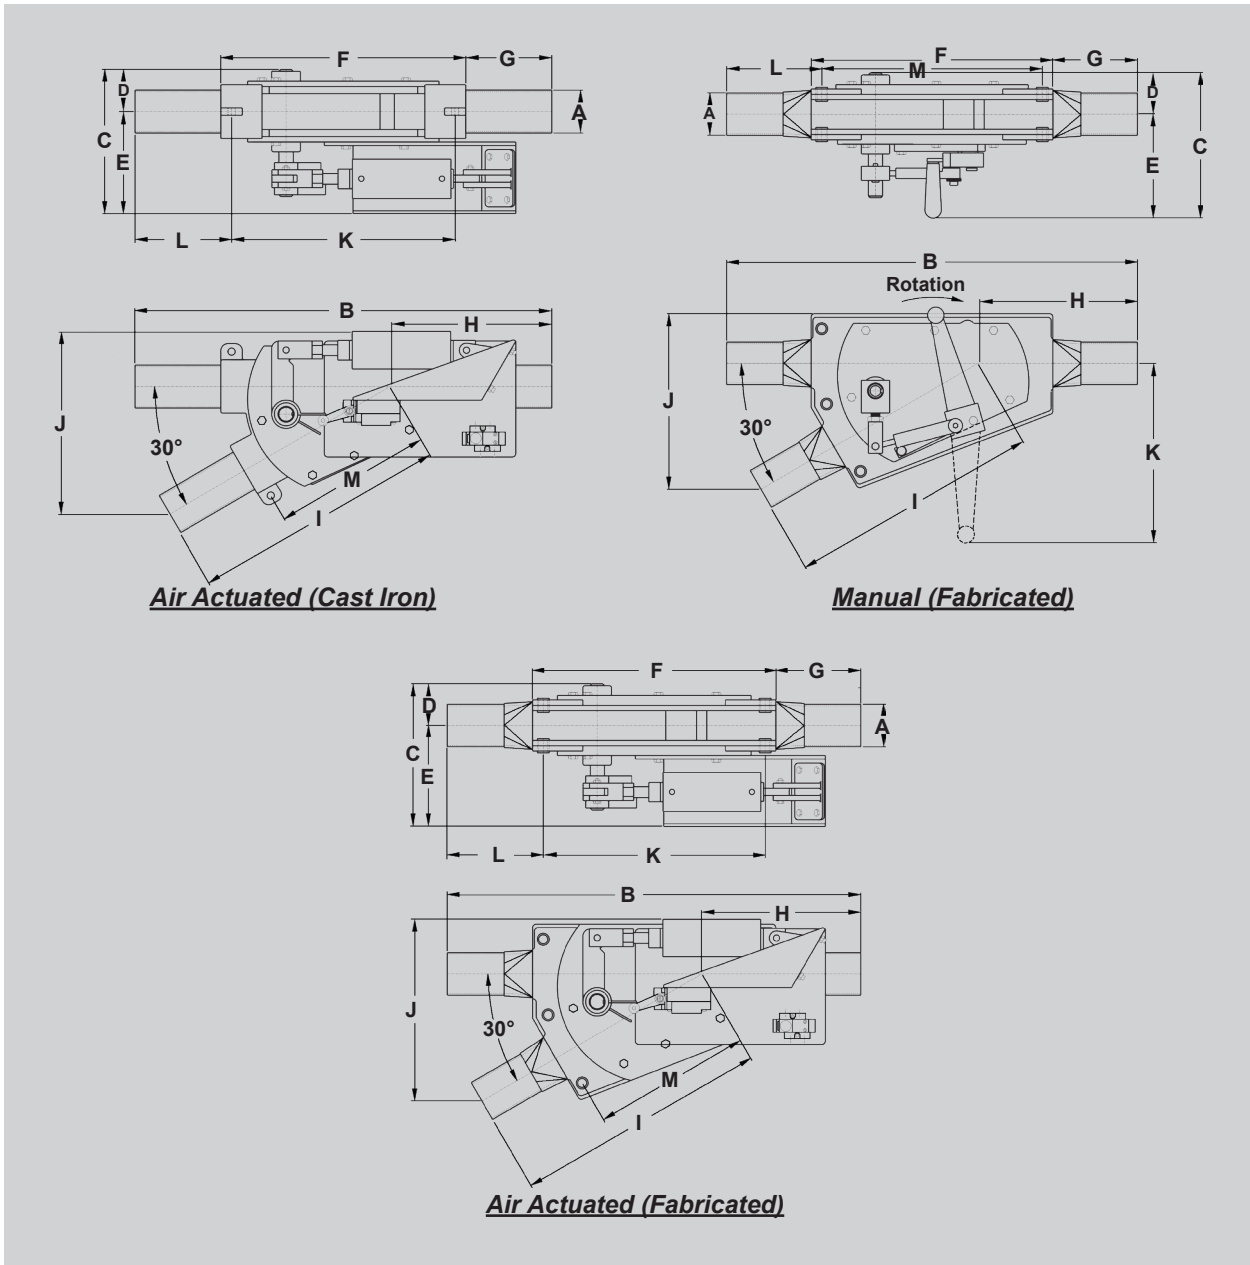

# Dimensions

## Air Actuated (Cast Iron)

Model	Dimensions (inches)													Cyl.	Weight (lbs.)
	A	B	C	D	E	F	G	H	I	J	K	L	M		
2.5	2.5	32.13	10.06	2.94	7.13	17.13	7.5	12.81	19.31	13.56	15.63	8.25	11.06	2-1/2 x 4	114
3	3	29.13	10.06	2.94	7.13	17.13	6	11.31	17.81	12.19	15.63	6.75	11.06	2-1/2 x 4	117
4	4	28.5	11.06	3.44	7.63	20.5	4	9.63	18.88	13.81	18.5	5	13.88	2-1/2 x 4	159
5	5	33.5	12.31	4	8.31	18.75	7.38	9.88	23.63	15.81	16.88	8.31	15.31	3 x 5	191
6	6	33.5	12.31	4	8.31	18.75	7.38	9.88	23.63	15.81	16.88	8.31	15.31	3 x 5	222

## Manual (Fabricated)

Model	Dimensions (inches)													Weight (lbs.)
	A	B	C	D	E	F	G	H	I	J	K	L	M	
2.5	2.5	29.13	10.31	2.94	7.38	17.13	6	11.19	17.88	10.75	12.69	6.75	15.63	96
3	3	29.13	10.31	2.94	7.38	17.13	6	11.19	17.88	10.75	12.69	6.75	15.63	98
4	4	32.5	11.31	3.44	7.88	20.5	6	11.69	20.81	13.97	14.31	7	18.5	124
5	5	33.5	12.38	4	8.38	18.75	7.38	10	23.5	15.38	15	8.13	17.25	143
6	6	33.5	12.38	4	8.38	18.75	7.38	10	23.5	15.38	15	8.13	17.25	148

## Air Actuated (Fabricated)

Model	Dimensions (inches)													Weight (lbs.)
	A	B	C	D	E	F	G	H	I	J	K	L	M	
2.5	2.5	29.13	10.06	2.94	7.13	17.13	6	11.19	17.88	12.19	15.63	6.75	11.13	103
3	3	29.13	10.06	2.94	7.13	17.13	6	11.19	17.88	12.19	15.63	6.75	11.13	105
4	4	32.5	11.06	3.44	7.63	20.5	6	11.69	20.81	13.47	18.5	7	13.81	136
5	5	33.5	12.56	4.25	8.31	18.75	7.38	10	23.5	15.38	17.25	8.13	15.38	158
6	6	33.5	12.31	4.25	8.69	18.75	7.38	10	23.5	15.38	17.25	8.13	15.38	163
8	8	59.5	15.75	5.88	9.88	35.5	12	20	39.5	25	34	12.75	26.75	342
10	10	60	18.75	7.38	11.38	36	12	18	42	27.5	34.5	12.75	29.25	420

### Schenck Process

7901 NW 107th Terrace  
 Kansas City, MO 64153  
 816-891-9300 or Fax: 816-891-8336  
[sales-fcp@schenckprocess.com](mailto:sales-fcp@schenckprocess.com)  
[www.schenckprocess.com/us](http://www.schenckprocess.com/us)



All information is given without obligation. All specifications are subject to change. © by Schenck Process, 2018